



LINBLE
力必拓

5G industrial router
LBT-T300-mini2

Product specification

Product overview

The T300mini2 industrial CPE router supports multiple Internet ACC (Ethernet/WIFI client/4G/5G) mode, multiple local data access (WIFI2.4G/Ethernet/RS232/RS485) full-stack intelligent protocol Internet of Things gateway equipment. The device is loaded with Wan communication, VPN tunnel, WIFI LAN, RS232/485 transparent transmission and other functions to realize seamless connection of wireless LAN, Ethernet, intelligent hardware and wireless Wan, providing users with high-speed, safe and reliable access services.

5G industrial router can also be used as vehicle-mounted special equipment. The equipment adopts metal shell, provides vehicle-mounted fixing piece, and is designed with IP30 protection grade.

Support WEB configuration mode, convenient and simple management, and support remote cloud control.

Field of applicat



Electricity



Petroleum



Coal mine



Finance



Communication



Public security



Heat



Industrial Control



Weather



Water Conservancy



Traffic



Municipal



Product character

1. Adopt metal shell with protection grade of IP30;
2. Support (WCDMA/CDMA/TD-SCDMA), 4G (FDD-LTE/TDD-LTE), 5G (SA/NSA);
- 3, UIM/SIM card ESD protection: 1.8V/3V standard push-type user card interface, built-in 15KV ESD protection; Serial port ESD protection: RS232 built-in 15 KV ESD protection, IEC61000-4-2 (Contact) \pm 30KV, IEC61000-2-4 (Air) \pm 30KV;
4. Standard RJ45 (Ethernet) interface built-in lightning protection 3000V (non-standardized configuration);
5. Industrial wireless dual-frequency high-power CPE: industrial wireless module is adopted, with strong anti-interference and stable transmission;
6. Software and hardware watchdog anti-crash design, after the router is disconnected, it will automatically power off and restart.
Ensure stable and reliable operation of the equipment;
- 7, automatic detection of network disconnection, automatic restart of dialing failure, timing restart and other functions;
8. Serial port transparent transmission function. The command control mode can be entered through the serial port to control the router and ancillary equipment;
9. Support multiple DDNS dynamic domain name services;
10. Port mapping, DMZ host and other functions;
11. Support VPN (PPTP Client, L2TP Client);

Functional overview

Software function

The way to surf the Internet	4/5G dial-up DHCP/Static IP/PPPoE
Number of users supported	Wired: 253, Wireless: 30
Operating system requirements	Windows XP/VISTA Linux 2.6 Windows 7 and above MAC OS: 10.3.7 and above
Browser requirements	IE: 6.0 and above Safari: 1.2.4 and above Firefox: 2.0.0.8 and above
Security management	Set up a firewall to prevent malicious attacks from the Internet on computers in the LAN. MAC filtering: prohibit MAC addresses that have been added. Access control: Control the access of computers in the LAN to the Internet. Port blocking: Block certain viruses from continuously initiating connections through a certain port to prevent Dos attacks
System Services	Virtual server: Set an internal server for Internet users to access DMZ: When the open port of the virtual server to be set is uncertain, it can be set as a DMZ host Port triggering: The wireless router can automatically open the inward service port according to the port of the LAN accessing the Internet. Serial port service: realize serial port data transmission, AT command control and other functions
Equipment management	Locale NTP server settings Back up system setup information Restart Recover Settings Information from File Change the password and restore to the factory settings Software upgrade Remote management
WLAN security mode	Open System WPA-PSK WPA2-PSK WPAPSK WPA2PSK (ie WPA-PSK and WPA2-PSK mixed mode) WPA1WPA2 (i.e. WPA and WPA2 mixed mode)

Hardware parameters

Wireless interface	IEEE802.11b/g/n
Operating frequency band	2412-2472MHz
Antenna	SMA external rotation and internal hole
WIFI transmission rate	300Mbps (MAX)
External interface	LAN port: 2 (LAN1 (optional) (WAN/LAN adaptive) RS232/485 interface: 1 interface: 1 SIM card slot: 1 Reset key: 1 Antenna interface: 6 Indicator light: 4 DC power supply
WIFI data	802.11n: -66dBm at 300Mbps/HT40 MCS7 : +15.5dBm 802.11b: -86dBm at 11Mbps/CCK: +18 dBm 802.11g: -73dBm at 54Mbps/OFDM: +15.5dBm
Frequency band supported (optional)	GN (Domestic-Qualcomm): Asia, Europe and Australia: 5G Sub-6: n1, n28, n41, n77, n78, n79 n1/3/5/8/20/28 /38/41/77/78 / LTE FDD: B1, B2, B3, B5, B7, B8, 79 LTE TDD: B34, B39, B40, B41 B1/3/5/7/8/19/20/28 GN (Domestic-Zhanrui) 5G Sub-6: n1, n28, n41, n78, n79 LTE FDD: B1, B2, B3, B5, B7, B8 B38/40/41/42 / LTE TDD: B34, B38, B39, B40, B41 43
Main frequency of storage memory	Store 16 MB Main frequency: 880MHz Memory 128MB [on chip]
Overall dimensions	Length, width and height: 123 * 84.2 * 30 mm (optional guide rail and fixed plate installation)
Power source	DC power supply: 6-36V/3A
Power consumption (current)	Less than 800mA
Work environment	Operating temperature: -30°C~+70°C Storage temperature: -40°C~+85°C Humidity:5%~95%, non-condensing

Interface description

Side A



Side B





Side A

1. 4/5G/WIFI antenna interface: SMA external rotation and internal hole interface.
2. RS232/RS485 serial interface: 3Pin terminal female Edg 3.5 * 2.
3. RESET key: press this key for 5 seconds in the power-on state, the SYS lamp will flash, and then restart, and the reset is successful.

Side B

3. SIM card slot: snap-in SIM card holder. If you need to take out the SIM card, gently push the SIM card.
4. LAN1/LN2: RJ45 interface; In standard router mode, LAN1 can be used as a WAN port.
5. DC power interface/terminal power supply (2Pin female Edg 3.5): 2.1mm round head power interface is adopted. Positive inside and negative outside, the input voltage is 12 V, and the recommended input power is more than 10 W.
6. WIFI antenna interface: SMA external rotation and internal hole interface.

Schematic diagram of shell locating holes

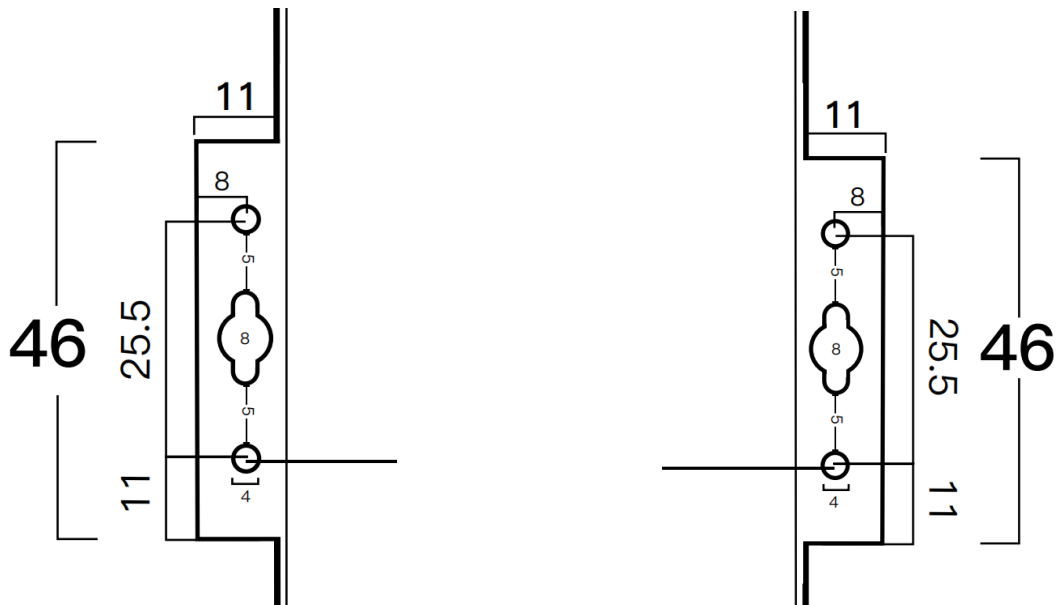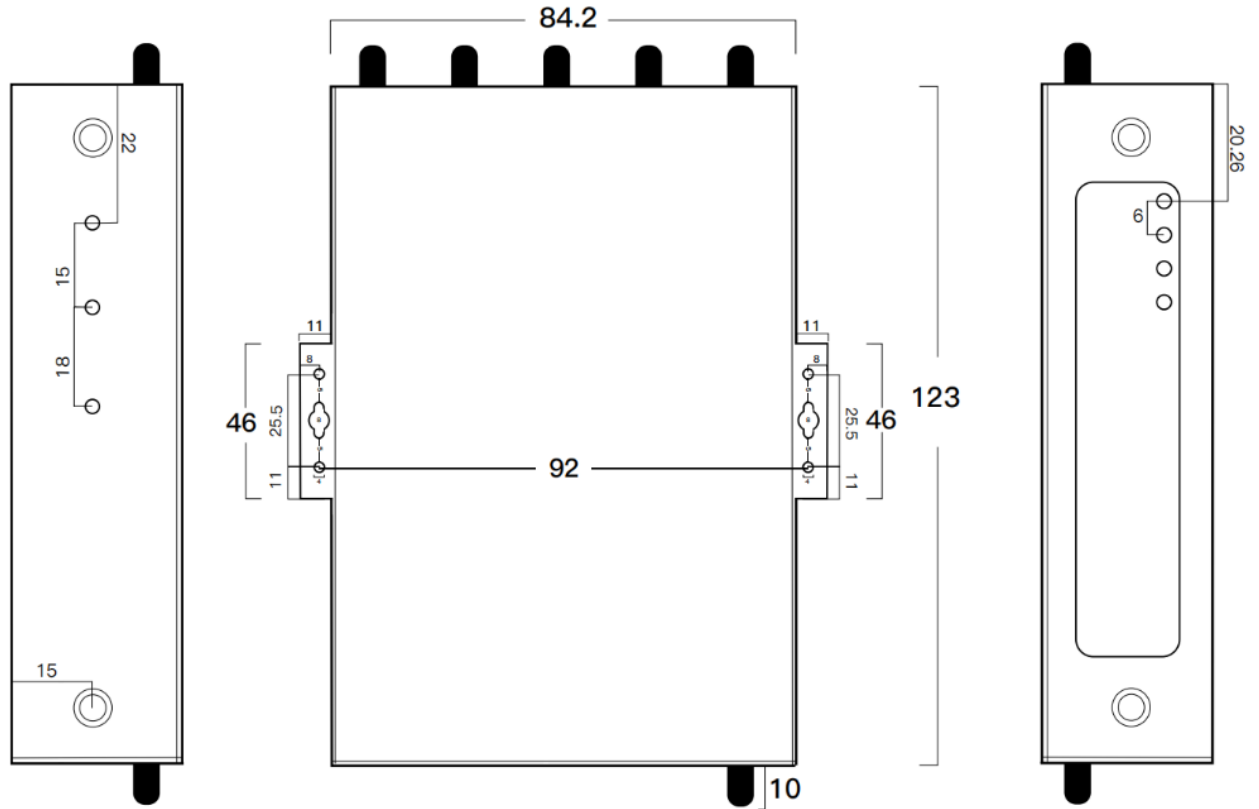

The product images, videos, and screen content on the above pages are for illustration only. The actual product effect (including but not limited to appearance, color, size) and screen display content (including but not limited to background, UI, graphics, videos) may have slight differences. Please refer to the actual product.

The data on the above page are theoretical values, all from internal laboratories. In actual use, there may be slight differences due to individual differences in products, software versions, usage conditions, and environmental factors. Please refer to the actual use situation.

Due to the real-time changes in product batches and production supply factors, in order to provide as accurate product information, specification parameters, and product characteristics as possible, we may adjust and revise the text and image effects on the above pages in real time to match the actual product performance, specifications, indices, components, and other information. If it is necessary to make the above modifications and adjustments, no special notice will be given.

The manufacturer strives to ensure the accuracy of the information provided, but does not assume responsibility for any possible errors or omissions.